

LED Flood Light Series



Product features:

- new portable, intelligent integrated circuit, using the built-in drive. Operation, whole lamp waterproof glue filling. Ultra thin light body, more conducive to suspension installation.
- sealing V optical lens toughened, IP66 protection grade, the transmittance reaches More than 98%, even light, soft light without glare.
- In the series of male and female butt joint design, safe and convenient; constant current stability, Intelligent control circuit; waterproof and dust proof design. Silica gel, temperature resistant -40 to +85 DEG C.

Application:

Basketball courts, supermarkets, shopping malls, factories, schools



10001955-2651



ไม่มีสารปรอทหรือ UV



ไม่มีสารพิษและสารเคมี





ใช้การอย่างปลอดภัย



ใช้การได้ผลอย่างมีประสิทธิภาพ



ประหยัดพลังงาน



Product Name	Power	Input Voltage	Luminous Flux	Color	CCT	Ra	IP	Specification		
								A	B	C
Led SMD Flood Light	10W	185-265V	850lm	Daylight/Warmlight	3000K/6500K	75	67	135	115	38
Led SMD Flood Light	20W	185-265V	1700lm	Daylight/Warmlight	3000K/6500K	75	67	183	153	47
Led SMD Flood Light	30W	185-265V	2550lm	Daylight/Warmlight	3000K/6500K	75	67	230	193	53
Led SMD Flood Light	50W	185-265V	4250lm	Daylight/Warmlight	3000K/6500K	75	67	283	238	60
Led SMD Flood Light	100W	185-265V	8500lm	Daylight/Warmlight	3000K/6500K	75	67	350	285	85
Led SMD Flood Light	150W	185-265V	12750lm	Daylight/Warmlight	3000K/6500K	75	67	425	325	113
Led SMD Flood Light	200W	185-265V	17000lm	Daylight/Warmlight	3000K/6500K	75	67	425	325	113

LED T8Full Set Lamp Series



Usage Note:

1. Please do not hit or press it with heavy substance.
2. Please handle and transport gently for led tube.
3. Please do not touch and twist the tube when power is on.
4. Light warm is normal when power is on.
5. Max connect 6pcs.

Application:

1. Building (architecture or home) decoration.
2. Home use for lighting.
3. Amusement park and theater lighting.
4. Emergency hallway lighting.
5. Shopping mall, restaurant, hotel, meeting room and advertisement signs backlighting.



ISO 9001:2015-2551



ไม่มีสารพิษ UV



ไม่มีสารพิษ





ไม่มีสารพิษ



ไม่มีสารพิษ



ไม่มีสารพิษ

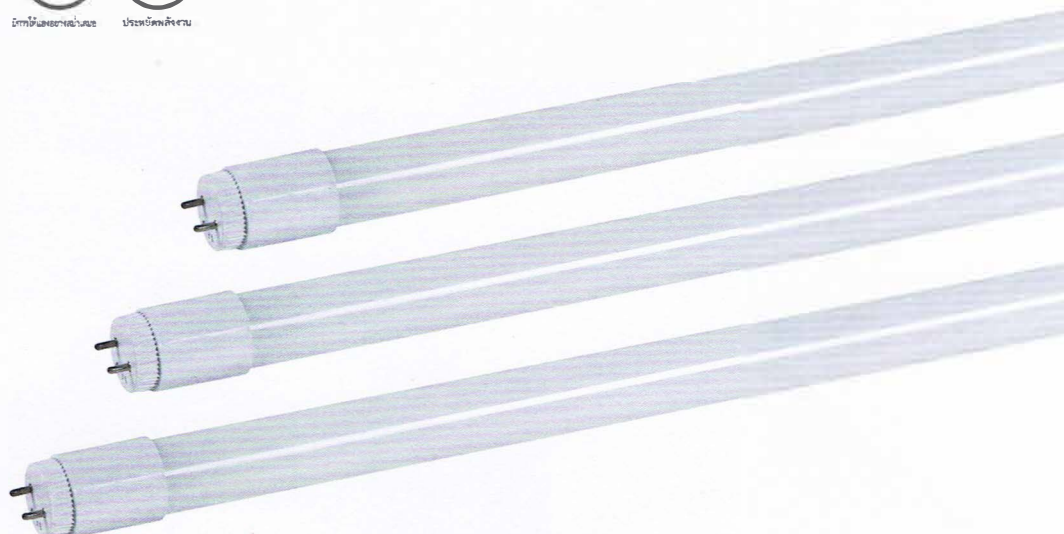

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED T8	9W	185-265V	DayLight/Warmwhite	920Lm	3000K/6500K	320°	75	G13	608	28.5
LED T8	18W	185-265V	DayLight/Warmwhite	1840Lm	3000K/6500K	320°	75	G13	1210	28.5

LED T8Full Set Lamp Series



Usage Note:

1. Please do not hit or press it with heavy substance.
2. Please handle and transport gently for led tube.
3. Please do not touch and twist the tube when power is on.
4. Light warm is normal when power is on.
5. Max connect 6pcs.

Application:

1. Building (architecture or home) decoration.
2. Home use for lighting.
3. Amusement park and theater lighting.
4. Emergency hallway lighting.
5. Shopping mall, restaurant, hotel, meeting room and advertisement signs backlighting.



LED 1955-2551



ไม่มีการแผ่รังสี UV



ไม่ก่อให้เกิดมลพิษ





ไม่รบกวนสายตา



การใช้ไม่กระทบต่อสุขภาพ



ประหยัดพลังงาน

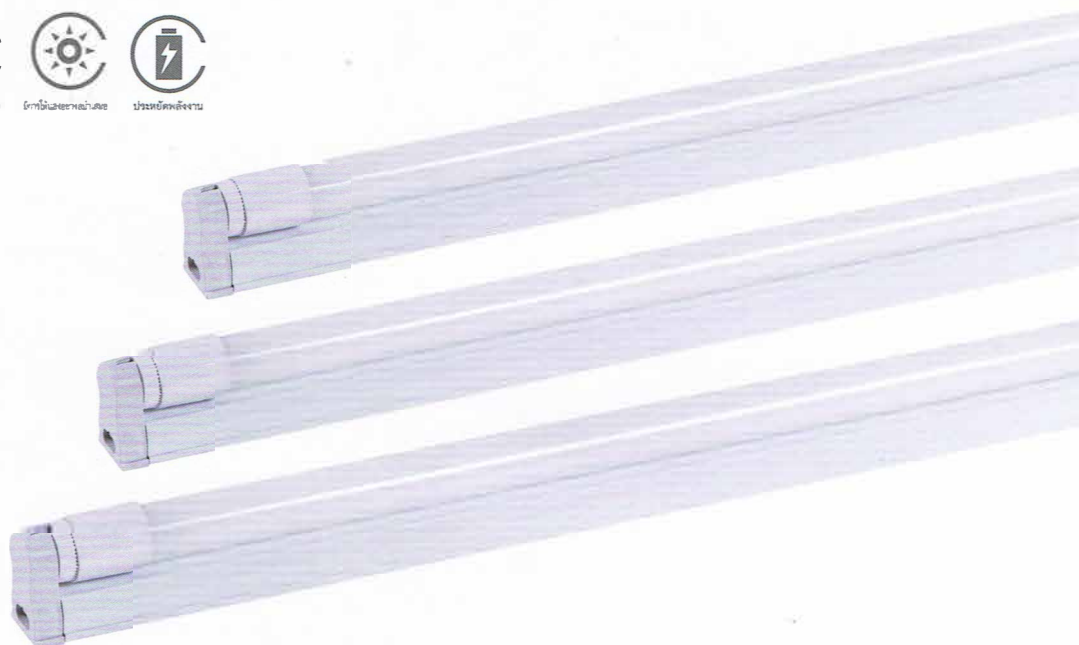

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED T8 Full Set	9W	185-265V	DayLight/Warmwhite	920Lm	3000K/6500K	320°	75	G13	615	50
LED T8 Full Set	18W	185-265V	DayLight/Warmwhite	1840Lm	3000K/6500K	320°	75	G13	1225	50

LED COB light Series




Product features:

- Seiko - Car Aluminum thickened aluminum lamp body, no rust corrosion does not fade and easy to clean;
- through the isolation transformer and switch controller, protection of the safe use of electricity;
- In the protection of the safe use of electricity, the working current of low energy consumption, long service life;
- In the bright LED chip, high brightness, long service life, soft light without glare;
- Stainless steel buckle - portable, convenient installation, stainless steel material, not born Rust, no discoloration, durable;

Application:

Commercial shops, exhibition halls, hotels, office premises lighting.

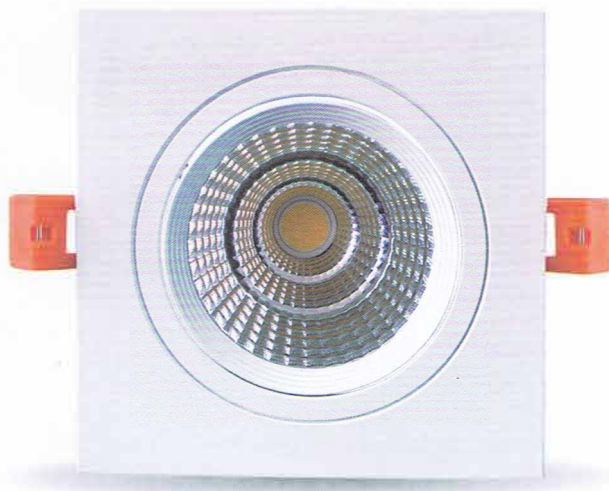

ISO 1955-2551



ไม่มีการแผ่รังสี UV



ไม่มีการปนเปื้อน




ไม่ก่อให้เกิดมลพิษ



การประหยัดพลังงาน



ประหยัดพลังงาน

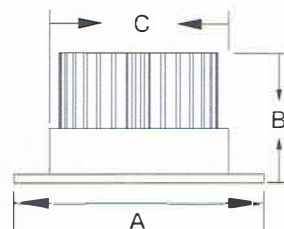

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	IP	Specification		
									A	B	C
LED COB Downlight Square	7W	185-265V	DayLight/Warmwhite	504Lm	3000K/6500K	36°	70	65	92	58	75
LED COB Downlight Square	10W	185-265V	DayLight/Warmwhite	750Lm	3000K/6500K	36°	70	65	120	78	90
LED COB Downlight Square	20W	185-265V	DayLight/Warmwhite	1500Lm	3000K/6500K	36°	70	65	140	80	120
LED COB Downlight Square	30W	185-265V	DayLight/Warmwhite	2250Lm	3000K/6500K	36°	70	65	160	120	140

LED COB light Series




Product features:

- Seiko - Car Aluminum thickened aluminum lamp body, no rust corrosion does not fade and easy to clean;
- through the isolation transformer and switch controller, protection of the safe use of electricity;
- In the protection of the safe use of electricity, the working current of low energy consumption, long service life;
- In the bright LED chip, high brightness, long service life, soft light without glare;
- Stainless steel buckle - portable, convenient installation, stainless steel material, not born Rust, no discoloration, durable;

Application:

Commercial shops, exhibition halls, hotels, office premises lighting.

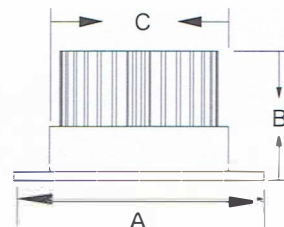

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	IP	Specification		
									A	B	C
LED COB Downlight Round	5W	185-265V	DayLight/Warmwhite	360Lm	3000K/6500K	36°	70	65	Φ 68	53	55
LED COB Downlight Round	7W	185-265V	DayLight/Warmwhite	504Lm	3000K/6500K	36°	70	65	Φ 90	58	75
LED COB Downlight Round	10W	185-265V	DayLight/Warmwhite	750Lm	3000K/6500K	36°	70	65	Φ 108	78	90
LED COB Downlight Round	20W	185-265V	DayLight/Warmwhite	1500Lm	3000K/6500K	36°	70	65	Φ 138	80	120
LED COB Downlight Round	30W	185-265V	DayLight/Warmwhite	2250Lm	3000K/6500K	36°	70	65	Φ 160	120	140

LED Slim Downlight Series




Product features:

■ Improve the uniformity of the previous to light, the light brighter, more soft and reliable security, longer, Durable, no visible screen flash improve reflective rate, make the kitchen more bright and adopt socket type Design, install and use more convenient;

Application:

Family, corridor, corridor, shopping malls, etc.

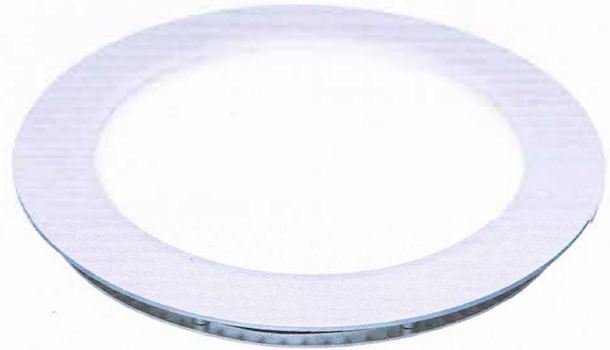

ISO 9001:2015



UV Protection



Recycling




Eye Protection



High Power



Long Life

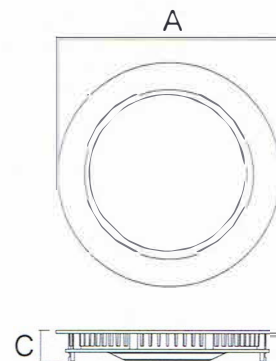

Product Name	Power	Input Voltage	Luminous Flux	Color	CCT	Ra	Specification A	Specification C	Open Size
LED Slim Downlight Round	3W	185-265V	195Lm	Daylight/Warmlight	3000K/6500K	70	Φ82	18	75mm
LED Slim Downlight Round	6W	185-265V	439Lm	Daylight/Warmlight	3000K/6500K	70	Φ120	18	110mm
LED Slim Downlight Round	9W	185-265V	657Lm	Daylight/Warmlight	3000K/6500K	70	Φ145	18	135mm
LED Slim Downlight Round	12W	185-265V	908Lm	Daylight/Warmlight	3000K/6500K	70	Φ175	18	160mm
LED Slim Downlight Round	15W	185-265V	1125Lm	Daylight/Warmlight	3000K/6500K	70	Φ200	18	185mm
LED Slim Downlight Round	18W	185-265V	1350Lm	Daylight/Warmlight	3000K/6500K	70	Φ225	18	210mm
LED Slim Downlight Round	24W	185-265V	1800Lm	Daylight/Warmlight	3000K/6500K	70	Φ300	18	285mm

LED Slim Downlight Series



Product features:

■ Improve the uniformity of the previous to light, the light brighter, more soft and reliable security, longer, Durable, no visible screen flash improve reflective rate, make the kitchen more bright and adopt socket type Design, install and use more convenient;

Application:

Family, corridor, corridor, shopping malls, etc.



ISO 9001-2008



ไม่มีการแผ่รังสี UV



ไม่มีการปนเปื้อนสารพิษ




ใช้ความสว่างปลอดภัย



มีการใช้หลอดประหยัดพลังงาน



ประหยัดพลังงาน



Product Name	Power	Input Voltage	Luminous Flux	Color	CCT	Ra	Specification			Open Size
							A	B	C	
LED Slim Downlight Square	3W	185-265V	195Lm	Daylight/Warmlight	3000K/6500K	70	85	85	18	75*75mm
LED Slim Downlight Square	6W	185-265V	439Lm	Daylight/Warmlight	3000K/6500K	70	120	120	18	110*110mm
LED Slim Downlight Square	9W	185-265V	657Lm	Daylight/Warmlight	3000K/6500K	70	145	145	18	135*135mm
LED Slim Downlight Square	12W	185-265V	908Lm	Daylight/Warmlight	3000K/6500K	70	175	175	18	160*160mm
LED Slim Downlight Square	15W	185-265V	1125Lm	Daylight/Warmlight	3000K/6500K	70	200	200	18	185*185mm
LED Slim Downlight Square	18W	185-265V	1350Lm	Daylight/Warmlight	3000K/6500K	70	225	225	18	210*210mm
LED Slim Downlight Square	24W	185-265V	1800Lm	Daylight/Warmlight	3000K/6500K	70	300	300	18	285*285mm

LED Ming Mounted Downlight Series



Product features:

■ Improve the uniformity of the pervious to light, the light brighter, more soft and reliable security, longer, Durable, no visible screen flash improve reflective rate, make the kitchen more bright and adopt socket type Design, install and use more convenient;

Application:

Family, corridor, corridor, shopping malls, etc.



1800 1955-2551



ไม่มีสารปรอทหรือ UV



ไม่มีสารพิษและสารเคมี



ไม่ทำอันตรายต่อสายตา



ใช้พลังงานอย่างมีประสิทธิภาพ



ประหยัดพลังงานถึง 90%

C



A

Product Name	Power	Input Voltage	Luminous Flux	Corol	CCT	Ra	Specification A	Specification C
LED Ming mounted Downlight Round	6W	185-265V	439lm	Daylight /Warmlight	3000K/6500K	70	118	35
LED Ming mounted Downlight Round	12W	185-265V	908lm	Daylight /Warmlight	3000K/6500K	70	170	35
LED Ming mounted Downlight Round	18W	185-265V	1350lm	Daylight/Warmlight	3000K/6500K	70	222	35
LED Ming mounted Downlight Round	24W	185-265V	1800lm	Daylight /Warmlight	3000K/6500K	70	297	35

LED Ming Mounted Downlight Series




Product features:

■ Improve the uniformity of the pervious to light, the light brighter, more soft and reliable security, longer, Durable, no visible screen flash improve reflective rate, make the kitchen more bright and adopt socket type Design, install and use more convenient;

Application:

Family, corridor, corridor, shopping malls, etc.

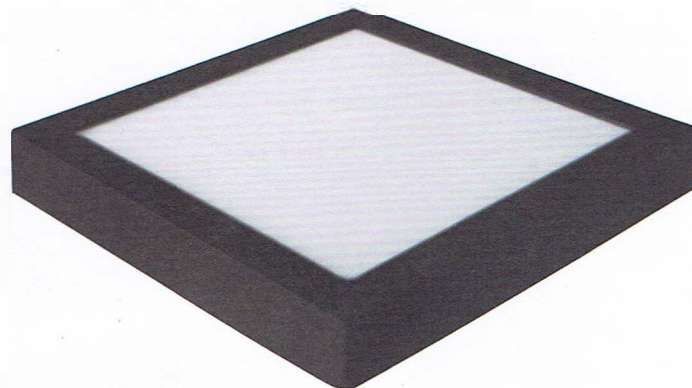

ISO 9001:2015-2551



ไม่มีการแผ่รังสี UV



ไม่ใช้พลาสติกและสารพิษ




ไม่กระทบสายตา



ใช้พลังงานอย่างประหยัด



ประหยัดพลังงาน



Product Name	Power	Input Voltage	Luminous Flux	Color	CCT	Ra	Specification		
							A	B	C
LED Ming mounted Downlight Square	6W	185-265V	439lm	Daylight /Warmlight	3000K/6500K	70	118	118	35
LED Ming mounted Downlight Square	12W	185-265V	908lm	Daylight /Warmlight	3000K/6500K	70	170	170	35
LED Ming mounted Downlight Square	18W	185-265V	1350lm	Daylight /Warmlight	3000K/6500K	70	222	222	35
LED Ming mounted Downlight Square	24W	185-265V	1800lm	Daylight /Warmlight	3000K/6500K	70	297	297	35

LED Mr16 Light Series



Product features:

- the Aluminum Alloy die casting, no ultraviolet and infrared, the protection of the illuminated objects.
- using COB chip, scale lens, beam output control, achieve good lighting effect Fruit, good anti dazzle effect, effectively protect eyesight.
- Cold - light source design, good heat dissipation, the temperature slightly higher than body temperature, long service life of the light source.
- light foot steel security lamp body and the connecting line is stable, the use of LED security Life expectancy, the use of standard lamp foot specifications, in line with the traditional MR16, GU10 requirements, suitable for A variety of lamp lamps.
- abandoned devices have no heavy metal pollution, green environmental protection.

Application:

- Commercial shops, exhibition halls, hotels, office premises lighting.



ISO 1955-2551



ไม่มีสารรังสี UV



ไม่มีการปนเปื้อนสารพิษ




ไม่ทำอันตรายต่อนัก



มีการใช้แสงอย่างเหมาะสม



ประหยัดพลังงาน

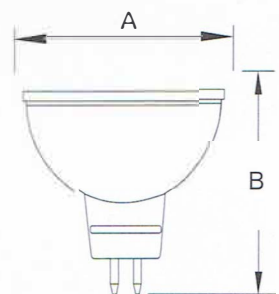

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification	
									A	B
LED MR16 220V D	5W	220V	Day Light	450Lm	6500K	110°	80	GU5.3	50	43
LED MR16 220V W	5W	220V	Warmwhite	450Lm	3000K	110°	80	GU5.3	50	43
LED MR16 12V D	5W	12V	Day Light	450Lm	6500K	110°	80	GU5.3	50	43
LED MR16 12V W	5W	12V	Warmwhite	450Lm	3000K	110°	80	GU5.3	50	43

LED GU10 Light Series



Product features:

- the Aluminum Alloy die casting, no ultraviolet and infrared, the protection of the illuminated objects.
- using COB chip, scale lens, beam output control, achieve good lighting effect Fruit, good anti dazzle effect, effectively protect eyesight.
- Cold - light source design, good heat dissipation, the temperature slightly higher than body temperature, long service life of the light source.
- light foot steel security lamp body and the connecting line is stable, the use of LED security Life expectancy, the use of standard lamp foot specifications, in line with the traditional MR16, GU10 requirements, suitable for A variety of lamp lamps.
- abandoned devices have no heavy metal pollution, green environmental protection.



Application:

- Commercial shops, exhibition halls, hotels, office premises lighting.



ใบอนุญาต 1955-2551



ไม่มีรังสีอัลตราไวโอเล็ต UV



ไม่มีสารพิษและสารอันตราย




ไม่ก่อให้เกิดอันตรายต่อนัยน์ตา



ไม่ก่อให้เกิดอันตรายต่อผิวหนัง



ไม่ก่อให้เกิดมลพิษทางไฟฟ้า

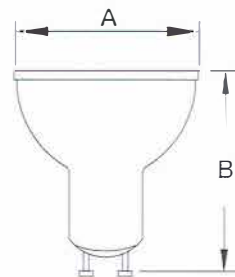

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED GU10	5W	220V	Day Light	450Lm	6500K	110°	80	GU10	50	48
LED GU10	5W	220V	Warmwhite	450Lm	3000K	110°	80	GU10	50	48

LED INSECT LIGHT Series



Product features:

■ high quality PC material, sturdy and durable, can bear high temperature, long time Lights will not deformation.

■ adopt Taiwan imported LED chip, using the mosquitoes don't like spectrum to achieve Drive midge purpose, at the same time, with the unique design of polarized light, and let the mosquito is easy to perceive.

Application:

Energy conservation and environmental protection, no radiation to human body, using range van: family, office, school and other indoor places.



Product Name	Power	Input Voltage	Colorl	CCT	Beam Angle	Ra	Lamp Type
LED Insect Light	7W	185-265V	Chrome yellow	1800K	270°	80	E27
LED Insect Light	15W	185-265V	Chrome yellow	1800K	270°	80	E27

LED Ceiling Kit Series



Product features:

■ Can through the lens refraction principle, scientific calculation of light refraction angle The light distribution is reasonable, and the inner part of the lamp shade is not formed Light, uniform light, thereby eliminating glare to clear the visual fatigue To enlarge the angle of the light through the lens layer, so that the light More uniform.



1001955-2551



ไม่มีสารยูวี UV



ไม่มีสารพิษตกค้าง




ไม่ระคายเคืองตา



ไม่มีสารพิษตกค้าง



ประหยัดพลังงาน



Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Ra	Specification A
LED Ceiling Kit	12W	185-265V	DayLigh/Warmwhite	1020Lm	3000K/6500K	70	Φ 230
LED Ceiling Kit	18W	185-265V	DayLigh/Warmwhite	1530Lm	3000K/6500K	70	Φ 300
LED Ceiling Kit	24W	185-265V	DayLigh/Warmwhite	2040Lm	3000K/6500K	70	Φ 350

LED Bulb Lamp Series



Product features:

■PC high optical transmittance mask, high transmittance, uniform color, bright eye Exquisite grille design, with good heat dissipation effect, so that the lamp heating Effective troubleshooting, ensure the lamp life.


■intelligent IC power supply provides a stable current for lamp, lamp is not affected by voltage instability Effect, effectively prolong the service life.

Application:

Public places, workshop lighting, sports lighting.



1955-2551 UV 1955-2551 UV 1955-2551 UV 1955-2551 UV 1955-2551 UV 1955-2551 UV

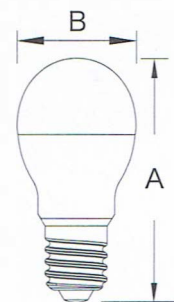

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED A60 5	5W	185-265V	Daylight/Warmwhite	525Lm	3000K/6500K	270°	80	E27	113	60
LED A60 7	7W	185-265V	Daylight/Warmwhite	735Lm	3000K/6500K	270°	80	E27	113	60
LED A60 9	9W	185-265V	Daylight/Warmwhite	945Lm	3000K/6500K	270°	80	E27	113	60
LED A60 12	12W	185-265V	Daylight/Warmwhite	1260Lm	3000K/6500K	270°	80	E27	125	60

LED Highwatt Bulb Series



Product features:

■PC high optical transmittance mask, high transmittance, uniform color, bright eye Exquisite grille design, with good heat dissipation effect, so that the lamp heating Effective troubleshooting, ensure the lamp life.


■intelligent IC power supply provides a stable current for lamp, lamp is not affected by voltage instability Effect, effectively prolong the service life.

Application:

Public places, workshop lighting, sports lighting.



1955-2551 1955-2551 1955-2551 1955-2551 1955-2551 1955-2551

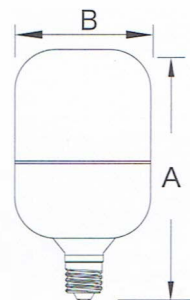

Product Name	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED Highwatt Bulb	13W	185-265V	Daylight/Warmwhite	1300Lm	3000K/6500K	180°	80	E27	128 70
LED Highwatt Bulb	18W	185-265V	Daylight/Warmwhite	1800Lm	3000K/6500K	180°	80	E27	158 80
LED Highwatt Bulb	28W	185-265V	Daylight/Warmwhite	2800Lm	3000K/6500K	180°	80	E27	183 100
LED Highwatt Bulb	40W	185-265V	Daylight/Warmwhite	4000Lm	3000K/6500K	180°	80	E27	209 120
LED Highwatt Bulb	60W	185-265V	Daylight/Warmwhite	6000Lm	3000K/6500K	180°	80	E27	257 150

LED Lowwatt Bulb Series



Product features:

■ Highlight LED chip, integrated non isolated constant current drive to ensure stable and stable current quality
The PC light transmission cover has the advantages of uniform transmission, high light transmittance and no dark area.

Application:

The utility model can be widely used for various scenes, such as home or business, convenient installation and wide applicability.



1001955-2551



ไม่มีสารปรอทหรือสารพิษ UV



ไม่มีสารพิษและสารอันตราย




ได้มาตรฐานความปลอดภัย



มีการใช้หลอดอย่างมีประสิทธิภาพ



ประหยัดพลังงาน



Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification	
									A	B
LED Bulb Candle Tip	3W	185-265V	Daylight/Warmwhite	180Lm	3000K/6500K	360°	80	E14	36	98
LED Bulb Candle Tail	3W	185-265V	Daylight/Warmwhite	180Lm	3000K/6500K	360°	80	E14	36	123

LED Lowwatt Bulb Series



Product features:

■ Highlight LED chip, integrated non isolated constant current drive to ensure stable and stable current quality
The PC light transmission cover has the advantages of uniform transmission, high light transmittance and no dark area.

Application:

The utility model can be widely used for various scenes, such as home or business, convenient installation and wide applicability.



1955-2551



ไม่มีรังสี UV



ไม่มีส่วนผสมของสารพิษ




มีอายุการใช้งานยาวนาน



มีค่าการส่องสว่างสูง




ประหยัดพลังงาน



Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	Lamp Type	Specification A	Specification B
LED Lowwatt Bulb Round	3W	185-265V	Daylight/Warmwhite	225Lm	3000K/6500K	180°	80	E27	45	80
LED Lowwatt Bulb Candle Tip	3W	185-265V	Daylight/Warmwhite	225Lm	3000K/6500K	180°	80	E14	36	98
LED Lowwatt Bulb Candle Tail	3W	185-265V	Daylight/Warmwhite	225Lm	3000K/6500K	180°	80	E14	36	123

LED Street light Series

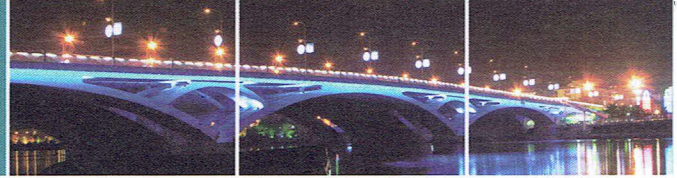

Product features:

- integration of die casting aluminum radiator, heat conducting adhesive The utility model is fixed on the radiator, which solves the heat dissipation problem perfectly and ensures the light Source life.
- In the highly toughened glass mask, the design and manufacture of optical principle, After special treatment, no spot, no light spot, light transmittance is close to 100%, With explosion-proof, waterproof, wear-resistant, protective chip and so on.
- In the light and as high as 100%, a light uniform, quality Special lens for street lamp.



Application:

The main road, roads, factories, schools, gardens, city square, garden road lighting



ISO 9001:2015



UV Protection



Recycling





Eye Protection



Light Protection




Battery Protection

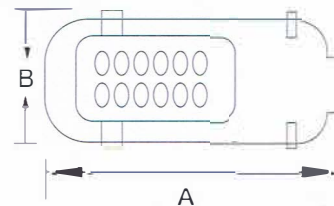

Product Name	Power	Input Voltage	Color	Luminous Flux	CCT	Beam Angle	Ra	IP	Specification		
									A	B	C
LED Street Light Mini	12W	185-265V	DayLight / Warmwhite	1020Lm	3000K/6500K	120°	80	65	370	103	75
LED Street Light Mini	24W	185-265V	DayLight / Warmwhite	2040Lm	3000K/6500K	120°	80	65	385	140	75
LED Street Light Mini	40W	185-265V	DayLight / Warmwhite	3400Lm	3000K/6500K	120°	80	65	497	213	75
LED Street Light Mini	60W	185-265V	DayLight / Warmwhite	5100Lm	3000K/6500K	120°	80	65	550	250	75

Led Tunnel Light Series

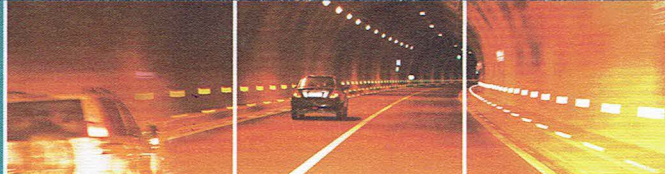

Product features:

- new portable, intelligent integrated circuit, using the built-in drive. Operation, whole lamp waterproof glue filling. Ultra thin light body, more conducive to suspension installation.
- sealing V optical lens toughened, IP66 protection grade, the transmittance reaches More than 98%, even light, soft light without glare.
- In the series of male and female butt joint design, safe and convenient; constant current stability, Intelligent control circuit; waterproof and dust proof design Silica gel, temperature resistant -40 to +85 DEG C.

Application:

Basketball courts, supermarkets, shopping malls, factories, schools



1001 1955-2551



ไม่มีสารยูวี UV



ไม่มีสารพิษและสารเคมี





ไม่กระเด็นและแตก



ใช้ไฟฟ้าอย่างประหยัด



ประหยัดพลังงาน

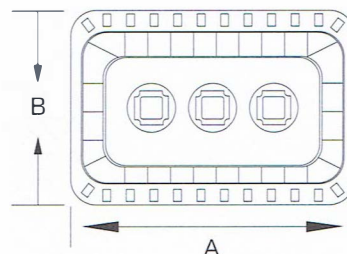


Product Name	Power	Input Voltage	Luminous Flux	Color	CCT	Ra	IP	Specification		
								A	B	C
LED Tunnel Light	150W	185-265V	12750lm	Daylight / Warmlight	3000K/6500K	75	65	455	315	180
LED Tunnel Light	200W	185-265V	17000lm	Daylight / Warmlight	3000K/6500K	75	65	455	315	180

LED High Bay Light Series



Product features:

- The reflecting surface of the lampshade is frosted to make the reflecting light more soft and even, and the irradiation area is wider.
- Microcomputer intelligent IC management system, make the circuit more stable, effective control of the current source to get rid of the flicker problem.
- The use of high quality aluminum reflector reflector, matte treatment to reflect the light more soft and even.
- The light transmittance of up to 95%, high strength engineering special acrylic, durable.
- Life can be up to 30000 hours, using serial connection scheme, the use of higher efficiency First, the use of integrated die casting cooling design, heat transfer performance increased by 30%.

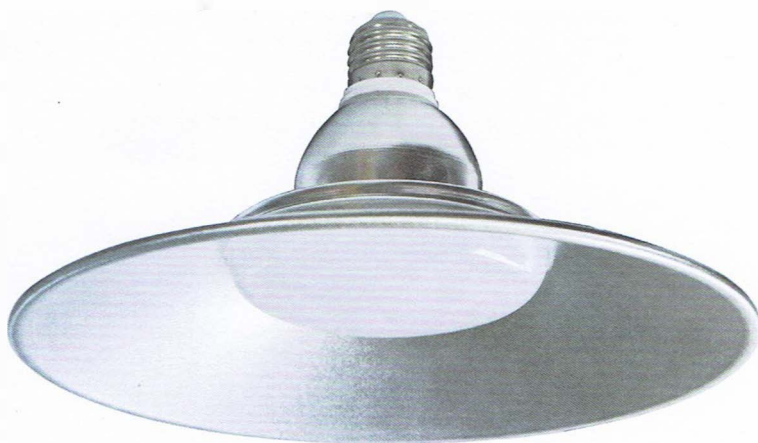

ใบอนุญาต 1955-2551



ไม่มีการแผ่รังสี UV



ไม่มีการปนเปื้อนของสารพิษ




ไม่ทำอันตรายต่อสายตา



ตัวทำไม่ละลายจากน้ำมันและ



ประหยัดพลังงาน

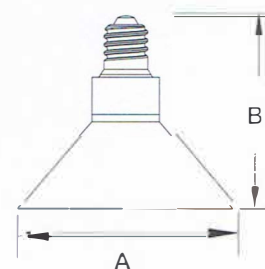

LED High Bay Light Series

Product Name	Power (W)	Input Voltage	Color	Luminous Flux	CCT (K)	Ra	IP	Lamp Type	Specification A	Specification B
LED High Bay	10W	185-265V	DayLigh/Warmwhite	700Lm	3000K/6500K	70	65	E27	173	100
LED High Bay	18W	185-265V	DayLigh/Warmwhite	943Lm	3000K/6500K	70	65	E27	210	115
LED High Bay	24W	185-265V	DayLigh/Warmwhite	1324Lm	3000K/6500K	70	65	E27	240	130
LED High Bay	36W	185-265V	DayLigh/Warmwhite	2330Lm	3000K/6500K	70	65	E27	280	145
LED High Bay	50W	185-265V	DayLigh/Warmwhite	3347Lm	3000K/6500K	70	65	E27	330	155
LED High Bay	70W	185-265V	DayLigh/Warmwhite	5193Lm	3000K/6500K	70	65	E27	380	160
LED High Bay	100W	185-265V	DayLigh/Warmwhite	6851Lm	3000K/6500K	70			405	210